

Floating Center Cap Assembly Instructions

Please review all components before installation




1 REMOVE EMBLEM

Using a heat gun or hair dryer Carefully remove the original Emblem from your OEM center Cap or hex.




2 CLEAN EMBLEM

Remove all adhesive, Grease, Dirt and Residue from the back of the emblem to ensure proper adhesion

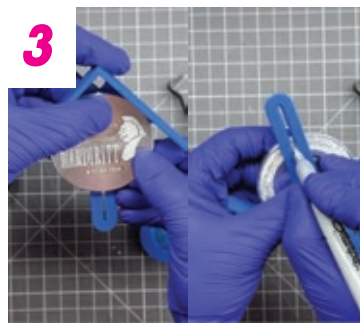

3 PREP & MARK

Place the Alignment Tool (Part #6) over the emblem. Align the orientation mark with the bottom slot of the tool. Use the center post to mark the bottom center of the emblem.

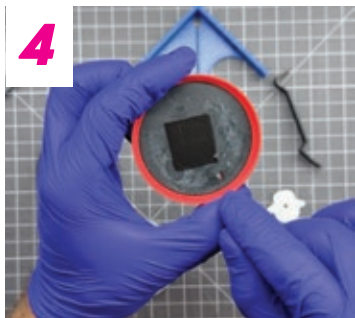

4 ALIGN EMBLEM


Place the Floating Disc (Part #1) into the Circular Alignment Tool (Part #6). Align the arrows with the tool and lower the emblem into position. Use the center mark made in the previous step to ensure the emblem is centered.



5 VERIFY ALIGNMENT

Remove the assembly from the Alignment Tool and verify the emblem is centered and level before continuing.

Press firmly once seated.

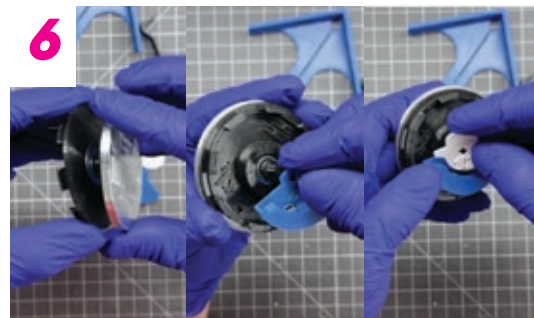

6 INSTALL

Install the counterweight (Part #4), then snap the weight lock (Part #5) into place. Carefully install the completed floating center cap assembly onto the wheel. That's it—ready to go.

IMPORTANT NOTES



First-Time Installation

BEFORE ASSEMBLING THE KIT, TEST FIT THE MOUNTING CAP (PART #2) ONTO THE WHEEL TO VERIFY PROPER FIT AND CLEARANCE.

OUR COMPONENTS ARE MANUFACTURED WITH VERY TIGHT TOLERANCES FOR A SECURE FIT. DURING INSTALLATION, GENTLY GUIDE THE CAP INTO PLACE AND ENSURE IT SEATS EVENLY. DO NOT FORCE THE CAP INTO THE WHEEL.



Modular Design

TECK DESIGNS FLOATING CENTER CAPS ARE FULLY MODULAR AND SERVICEABLE.

OEM EMBLEMS CANNOT BE REMOVED FROM THE FLOATING DISC (PART #1) WITHOUT DAMAGE. IF YOU PLAN TO SWITCH BETWEEN MULTIPLE EMBLEM DESIGNS, WE RECOMMEND PURCHASING AN ADDITIONAL SET OF FLOATING DISCS.

INDIVIDUAL REPLACEMENT COMPONENTS ARE AVAILABLE SEPARATELY.



Avoid Excessive Disassembly

WHILE THE KIT IS FULLY SERVICEABLE, REPEATED UNNECESSARY DISASSEMBLY CAN GRADUALLY WEAR PLASTIC MOUNTING FEATURES OVER TIME. ALWAYS USE THE INCLUDED PRY TOOL WHEN DISASSEMBLING THE KIT.

IF ADDITIONAL OR REPLACEMENT TOOLS ARE NEEDED, THEY ARE AVAILABLE FOR PURCHASE ON OUR WEBSITE.



Clean Mounting Surface

FOR THE BEST BOND AND OVERALL PERFORMANCE, ENSURE THE BACK OF THE EMBLEM AND ALL MOUNTING SURFACES ARE COMPLETELY CLEAN AND FREE OF ADHESIVE, GREASE, DIRT, AND RESIDUE BEFORE INSTALLATION. BEFORE INSTALLING THE COMPLETED ASSEMBLY, VERIFY THE EMBLEM IS CENTERED AND THE WEIGHT LOCK IS FULLY SEATED.



Handle With Care

AVOID AGGRESSIVELY FLICKING OR SPINNING THE FLOATING EMBLEM BY HAND. SIDE IMPACTS OR EXCESSIVE FORCE CAN TEMPORARILY MOVE THE FLOATING DISC OFF ITS ROTATIONAL AXIS OR AFFECT EMBLEM ALIGNMENT.

THE FLOATING ASSEMBLY IS DESIGNED TO OPERATE WHILE DRIVING. NOT FROM EXCESSIVE MANUAL FORCE.


⚠ Take your time and follow each step carefully. Need help? Contact us through our website.

Thank you for supporting Teck Designs.

EXPAND YOUR KIT

Add an extra set of Floating Discs and Switch between emblem styles in seconds

TeckDesignsCaps.com



@TeckDesigns